




ISO BEARING-SINGAPORE (PTE)LTD.

53,975 mm x 122,238 mm x 31,75 mm KOYO
66584/66520 tapered roller bearings

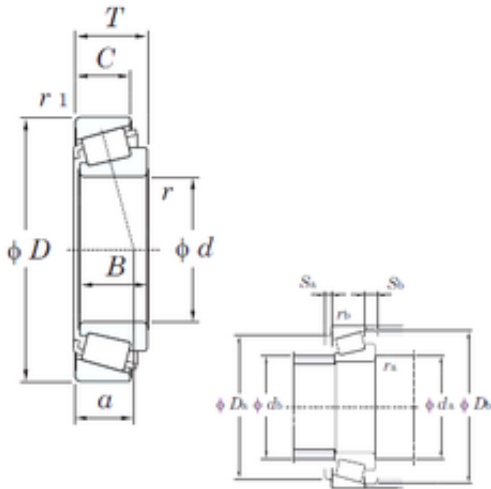

Bearing No. 66584/66520

| | |
|-------------------------------|--------------------------|
| Size | 53.975x122.238x33.338 mm |
| Bore Diameter | 53,975 mm |
| Outer Diameter | 122,238 mm |
| Width | 33,338 mm |
| d | 53,975 mm |
| D | 122,238 mm |
| T | 33,338 mm |
| B | 31,75 mm |
| C | 23,812 mm |
| a | 35,4 mm |
| r min. | 3,6 mm |
| r2 min. | 3,2 mm |
| da min. | 75 mm |
| Da | 105 mm |
| db min | 68 mm |
| ra max. | 3,6 mm |
| rb max. | 3,2 mm |
| Db | 116 mm |
| Weight | 1,801 Kg |
| Basic dynamic load rating (C) | 128 kN |
| Basic static load rating (C0) | 153 kN |
| (Grease) Lubrication Speed | 3300 r/min |
| (Oil) Lubrication Speed | 4300 r/min |
| Calculation factor (e) | 0,67 |
| Calculation factor (Y0) | 0,5 |

66584/66520 Bearing 2D drawings and 3D CAD models



ISO BEARING-SINGAPORE (PTE)LTD.