




# ISO BEARING-SINGAPORE (PTE)LTD.

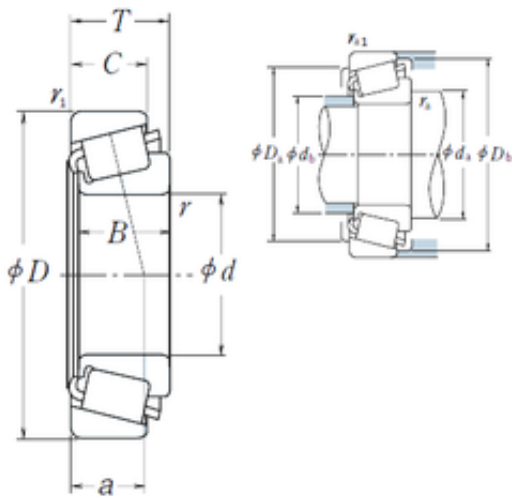

41,275 mm x 80,167 mm x 25,4 mm NSK  
26882/26820 tapered roller bearings

Bearing No. 26882/26820

26882/26820 Bearing 2D drawings and 3D CAD models

Size	41.275x80.167x25.4 mm
Bore Diameter	41,275 mm
Outer Diameter	80,167 mm
Width	25,4 mm
d	41,275 mm
D	80,167 mm
T	25,4 mm
B	25,4 mm
C	20,638 mm
ra1 max.	3,3 mm
a	18 mm
r min.	3,5 mm
r1 min.	3,3 mm
Da	69 mm
db	47 mm
ra max.	3,5 mm
da	54 mm
Db	74 mm
Weight	0,568 Kg
Basic dynamic load rating (C)	77 kN
Basic static load rating (C0)	98,5 kN
(Grease) Lubrication Speed	4800 r/min
(Oil) Lubrication Speed	6300 r/min
Calculation factor (e)	0,32
Calculation factor (Y0)	1



## ISO BEARING-SINGAPORE (PTE)LTD.

LangID	1
ALP23	0
outer r	3.3
ALP22	0
D_	80.167
ALP21	24
SHOG_yobi	26882/26820
RAr	173.558
inner r	3.5
GRS rpm	4800
D_b	74
D_a	69
DE_	68.237
SLR	18
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	12
SDM_	59.835
DA1	9.237
DA2	8.283
hidYobi	26882/26820
Y1	1.9
B_	25.4
Oil rpm	6300
hidTable	ecat_NSTPRI
Y0	1
inner ra	3.5
outer rb	3.3
C0	98.5
CUP	0.219
e	0.32
DA_	8.762



## ISO BEARING-SINGAPORE (PTE)LTD.

BET21	3
BET22	3
BET23	0
Z_	18
C_	20.638
yobi	26882/26820
KBRG	3161
CONE	0.349
DI_	51.173