




ISO BEARING-SINGAPORE (PTE)LTD.

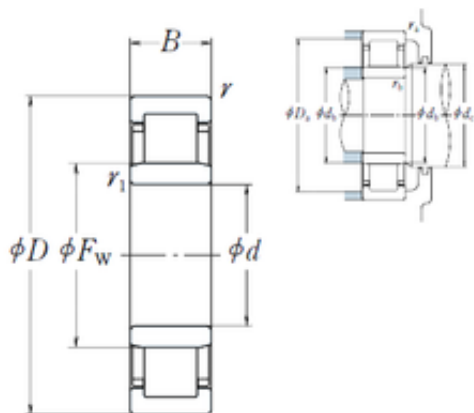

75 mm x 115 mm x 20 mm NSK NU1015 cylindrical roller bearings

Bearing No. NU1015

| | |
|-------------------------------|-------------|
| Bore Diameter | 75 mm |
| Outer Diameter | 105 mm |
| d | 75 mm |
| Fw | 85 mm |
| D | 115 mm |
| Ew | 105 mm |
| B | 20 mm |
| C | 20 mm |
| r min. | 1,1 mm |
| r1 min. | 1 mm |
| da min. | 81,5 mm |
| ra max. | 1 mm |
| rb max. | 1 mm |
| Weight | 0,731 Kg |
| Basic dynamic load rating (C) | 60 kN |
| Basic static load rating (C0) | 74,5 kN |
| (Grease) Lubrication Speed | 5 600 r/min |
| Category | Bearings |
| Inventory | 0.0 |
| Manufacturer Name | NSK |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| Product Group | B04144 |
| hidYobi | NU1015 |
| LangID | 1 |

NU1015 Bearing 2D drawings and 3D CAD models



ISO BEARING-SINGAPORE (PTE)LTD.

| | |
|------------|-------------|
| D_ | 115 |
| B_ | 20 |
| hidTable | ecat_NSCLDR |
| Oil rpm | 6700 |
| rb | 1 |
| mass | 0.731 |
| GRS rpm | 5600 |
| ra | 1 |
| db max | 83 |
| TSR rpm | 6000 |
| C0 | 74.5 |
| DE_ | 105 |
| Prod_Type3 | CRB_SR_NU |
| da | 81.5 |
| DA_ | 10 |
| Z_ | 21 |
| D_a max | 108.5 |
| yobi | NU1015 |
| C_conv | 60000 |
| ALPHA_ | 0 |
| SDM_ | 95 |
| r | 1.1 |
| db min | 80 |
| dc min | 87 |
| KBRG | 4144 |
| SBRG | 10 |
| r1 | 1 |
| DI_ | 85 |