




## ISO BEARING-SINGAPORE (PTE)LTD.

50 mm x 72 mm x 12 mm NTN 6910LLU deep groove ball bearings

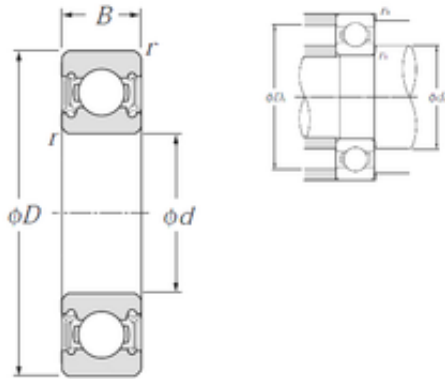

Bearing No. 6910LLU

6910LLU Bearing 2D drawings and 3D CAD models

Size	50x72x12 mm
Bore Diameter	50 mm
Outer Diameter	72 mm
Width	12 mm
d	50 mm
D	72 mm
B	12 mm
C	12 mm
r min.	0,6 mm
da min.	54 mm
da max	55,5 mm
Da max.	68 mm
ra max.	0,6 mm
Weight	0,132 Kg
Basic dynamic load rating (C)	13,4 kN
Basic static load rating (C0)	11,2 kN
Reference speed	5 100 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359006896
Product Group	B00308
Enclosure	2 Seals



## ISO BEARING-SINGAPORE (PTE)LTD.

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	50MM Bore; 72MM Outside Diameter; 12MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.302
Bore	1.969 Inch   50 Millimeter
Outside Diameter	2.835 Inch   72 Millimeter
Outer Race Width	0.472 Inch   12 Millimeter
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	50 mm



## ISO BEARING-SINGAPORE (PTE)LTD.

precision rating:	ISO Class 0
outside diameter:	72 mm
finish/coating:	Uncoated
overall width:	12 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	12 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	12 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	5100 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	11000 RPM
dynamic load capacity:	13400 N
series:	69
static load capacity:	11200 N
manufacturer product page:	<a href="#">Click here</a>