




# ISO BEARING-SINGAPORE (PTE)LTD.

110 mm x 170 mm x 28 mm NTN 6022LLU  
deep groove ball bearings

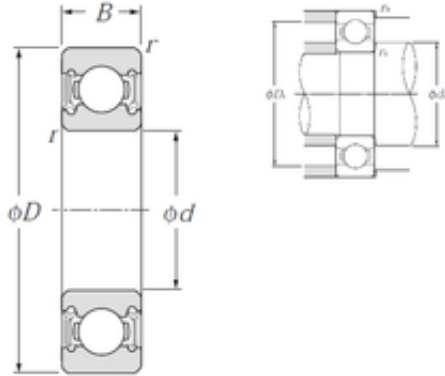

Bearing No. 6022LLU

6022LLU Bearing 2D drawings and 3D CAD models

Size	110x170x28 mm
Bore Diameter	110 mm
Outer Diameter	170 mm
Width	28 mm
d	110 mm
D	170 mm
B	28 mm
C	28 mm
r min.	2 mm
da min.	119 mm
da max	126 mm
Da max.	161 mm
ra max.	2 mm
Weight	1,96 Kg
Basic dynamic load rating (C)	82 kN
Basic static load rating (C0)	73 kN
Reference speed	2 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0



## ISO BEARING-SINGAPORE (PTE)LTD.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	110MM Bore; 170MM Outside Diameter; 28MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	4.32
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	1.102 Inch   28 Millimeter
Outside Diameter	6.693 Inch   170 Millimeter
Bore	4.331 Inch   110 Millimeter
bore diameter:	110 mm
precision rating:	ISO Class 0



## ISO BEARING-SINGAPORE (PTE)LTD.

outside diameter:	170 mm
finish/coating:	Uncoated
overall width:	28 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	28 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	28 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	2300 rpm
internal clearance:	CN
fillet radius:	2 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	4500 RPM
dynamic load capacity:	82000 N
series:	60
static load capacity:	73000 N
manufacturer product page:	<a href="#">Click here</a>